



■ OHSAS 18001:2007
Certificat Nr.: 2008008



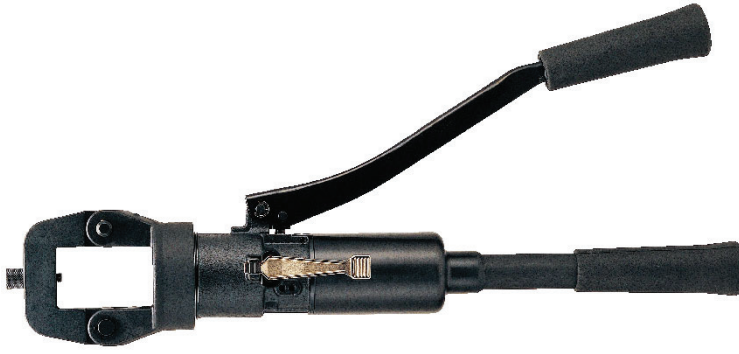
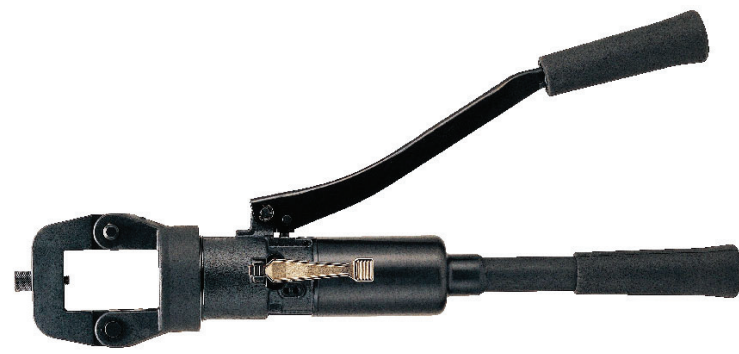
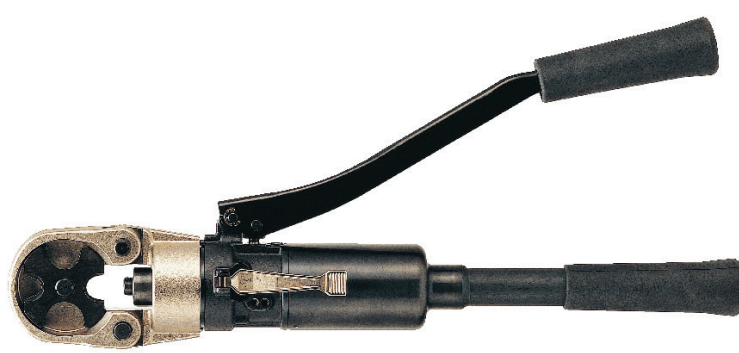
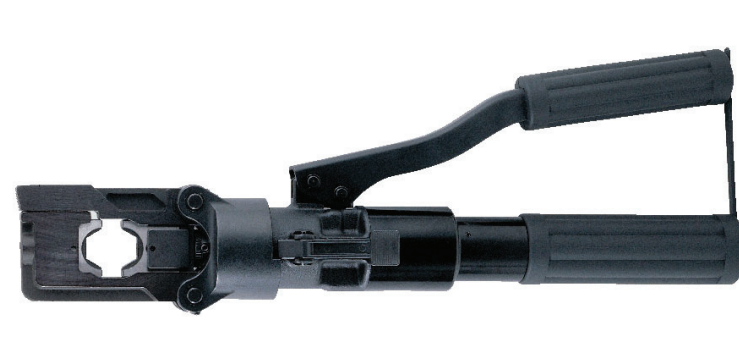
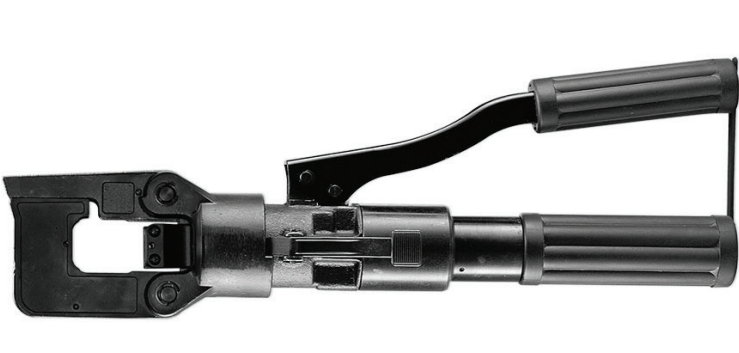
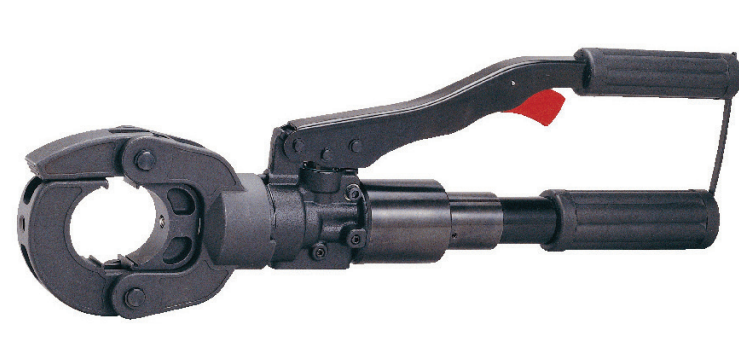
■ ISO 14001:2004
Certificat Nr.: TA254-QC-EC



■ IECQ QC 080001
Certificat Nr.: TW-HSPM-1237-1



■ ISO 9001:2008
Certificat Nr.: TA254-QC-EC

Cleste serizat	Produs	Forta exercit ata (tone)	Cursa cilindru (mm)	Greutat e (kg)	CNS	Aplicatii		
						Papuci cu ureche de otel / conductori	Papuci cu ureche de Cu / conductori	Papuci cu ureche de Al / conductori
HH-400		14,3	27,8	5,8	extra-catalog	Fara bacuri		
HH-400I		14,3	27,8	5,8	extra-catalog		8-325 mm²	
HH-400X		14,3	27,8	5,8	extra-catalog		22-325 mm²	
HH-400XL		14,3	27,8	5,8	extra-catalog		120-400 mm²	
9H-150		12,7	17	5	pag. 614		14-150 mm²	
HYCP-185		5,3	16,7	2,1	pag. 615	(Accepta bacuri BEKU)	185 mm²	150 mm²
HYCP-240R		5,3	13,5	2,4	pag. 615		240 mm²	185 mm²
PH-240		6,2	16	3,2	extra-catalog	(Accepta toate tipurile de bacuri utilizate pentru Alcoa, Bumdy, T&B, Klauke, Cembre si Blackburn de 6 tone)	240 mm²	185 mm²
UCP-240		8,8	20,1	4,6	pag. 615	(Accepta bacuri BEKU)	240 mm²	185 mm²
UCP-2613		12,7	26	5,3	extra-catalog	(Accepta toate tipurile de bacuri utilizate pentru Alcoa, Bumdy, T&B, Klauke, Cembre si Blackburn de 12 tone)	pana la 400 mm²	pana la 300 mm²
UB-400		12,7	26	6,7	extra-catalog		pana la 400 mm²	pana la 300 mm²
UB-400C		12,7	26	6,7	extra-catalog		pana la 400 mm²	pana la 300 mm²
UCP-2712		12,7	27	6,2	pag. 616		pana la 400 mm²	pana la 300 mm²
UC-6FT		6,4	32	5,8	extra-catalog	Papuci tip Anderson pana la 750 mm²		
UB-412		11,6	32	6,5	pag. 616	(Accepta toate tipurile de bacuri utilizate pentru Alcoa, Bumdy, T&B, Klauke, Cembre si Blackburn de 12 tone)	pana la 400 mm²	pana la 300 mm²
UB-412C		11,6	32	6,5	extra-catalog		pana la 400 mm²	pana la 300 mm²
HYCP-4413		12,7	44	7,6	pag. 616		pana la 400 mm²	pana la 300 mm²
HYCP-4413C		12,7	44	7,6	extra-catalog		pana la 400 mm²	pana la 300 mm²
UC-6		6,4	29,8	5,8	extra-catalog	Papuci tip Anderson pana la 500 mm²		
UC-6C		6,4	29,8	5,8	extra-catalog	Papuci tip Anderson pana la 500 mm²		