

NOU!


CHEI DINAMOMETRICE CU AFISAJ ELECTRONIC



266 (627575)

1.5 - 30Nm

- Avertizare la atingerea cuplului: Sonor + 12 LED-uri
- modul de functionare: Peak hold / Track
- Selectie unitate masura: N-m, in-lb, ft-lb, kg-cm
- Tip cap: cap interschimbabil
- Numar dinti clichet: 52
- Alimentare: baterii AA x 2 buc (nu este incluse)
- Durata de viata a bateriei (functionare continua): 110 ore.
- Durata de viata a bateriei (standby): 1 an
- Capacitate memorie de date: 250 masuratori
- 10 presetari
- Temperatura de functionare: -10°C ~ 60°C
- Temperatura de depozitare: -20°C ~ 70°C
- Umiditate: pana la 90% fara condens
- Test la cadere: 1 m
- Test vibratii: 10G
- Garantie: 10.000 ciclu / un an
- Etalonari online
- Certificat de compatibilitate electromagnetica

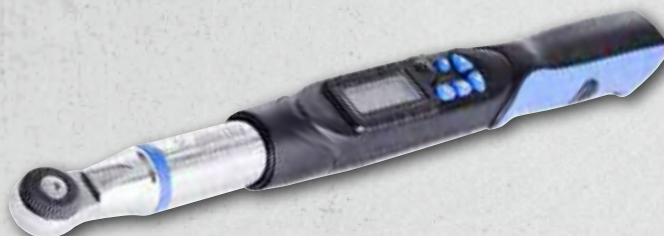


Articol SKU	Patrat (inch)	Lungime (mm)	Precizie	Cuplu maxim	Domeniu de cupluri	Rezolutie	Conectivitate PC
266 (627575)	1/4	390	CW: +/-2% CCW: +/-3%	30 N-m 22.12 ft-lb 265.5 in-lb 306.1 kg-cm	1.5~30 N-m 1.11~22.12 ft-lb 13.3~265.5 in-lb 15.3~306.1 kg-cm	0.01 N-m 0.01 ft-lb 0.1 in-lb 0.1 kg-cm	DA

266 (627576)

6.8 - 135Nm

- Avertizare la atingerea cuplului: Sonor + 12 LED-uri
- modul de functionare: Peak hold / Track
- Selectie unitate masura: N-m, in-lb, ft-lb, kg-cm
- Tip cap: cap interschimbabil
- Numar dinti clichet: 52
- Alimentare: baterii AA x 2 buc (nu este incluse)
- Durata de viata a bateriei (functionare continua): 110 ore.
- Durata de viata a bateriei (standby): 1 an
- Capacitate memorie de date: 250 masuratori
- 10 presetari
- Temperatura de functionare: -10°C ~ 60°C
- Temperatura de depozitare: -20°C ~ 70°C
- Umiditate: pana la 90% fara condens
- Test la cadere: 1 m
- Test vibratii: 10G
- Garantie: 10.000 ciclu / un an
- Etalonari online
- Certificat de compatibilitate electromagnetica

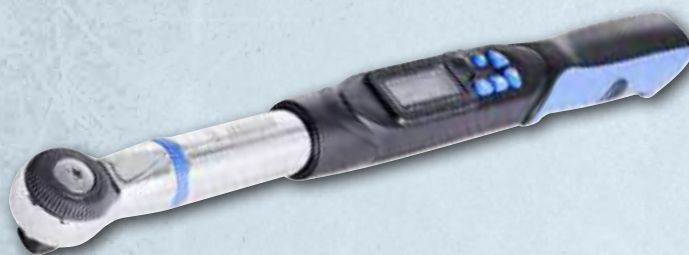

Articol SKU	Patrat (inch)	Lungime (mm)	Precizie	Cuplu maxim	Domeniu de cupluri	Rezolutie	Conectivitate PC
266 (627576)	1/2	410	CW: +/-2% CCW: +/-3%	135 N-m 99.5 ft-lb 1195 in-lb 1378 kg-cm	6.8~135 N-m 5~99.5 ft-lb 60~1195 in-lb 69~1378 kg-cm	0.1 N-m 0.1 ft-lb 1 in-lb 1 kg-cm	DA

266 (627577)

10 - 200Nm

- Avertizare la atingerea cuplului: Sonor + 12 LED-uri
- modul de functionare: Peak hold / Track
- Selectie unitate masura: N-m, in-lb, ft-lb, kg-cm
- Tip cap: cap interschimbabil
- Numar dinti clichet: 52
- Alimentare: baterii AA x 2 buc (nu este incluse)
- Durata de viata a bateriei (functionare continua): 110 ore.
- Durata de viata a bateriei (standby): 1 an
- Capacitate memorie de date: 250 masuratori
- 10 presetari
- Temperatura de functionare: -10°C ~ 60°C
- Temperatura de depozitare: -20°C ~ 70°C
- Umiditate: pana la 90% fara condens
- Test la cadere: 1 m
- Test vibratii: 10G
- Garantie: 10.000 ciclu / un an
- Etalonari online
- Certificat de compatibilitate electromagnetica



Articol SKU	Patrat (inch)	Lungime (mm)	Precizie	Cuplu maxim	Domeniu de cupluri	Rezolutie	Conectivitate PC
266 (627577)	1/2	410	CW: +/-1% CCW: +/-2%	200 N-m 147.5 ft-lb 1770 in-lb 2041 kg-cm	10~200 N-m 7.4~147.5 ft-lb 88~1770 in-lb 102~2041 kg-cm	0.1 N-m 0.1 ft-lb 1 in-lb 1 kg-cm	DA